





THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
F	ECN 10768: UPDATE MAT'L, .45 WAS .44, UPDATE CABLE STRIPPING DIM'S	11/03/2020	SRAUTUS

DESCRIPTION	MATERIAL	FINISH
CENTER CONTACTS	PHOSPHOR BRONZE	GOLD
OUTER CONTACT	BRASS	NICKEL
COUPLING NUT	BRASS	NICKEL
FERRULE	BRASS	NICKEL
GASKET	MVQ	-
INSULATOR	PTFE	-
RETAINING RING	PHOSPHOR BRONZE	-

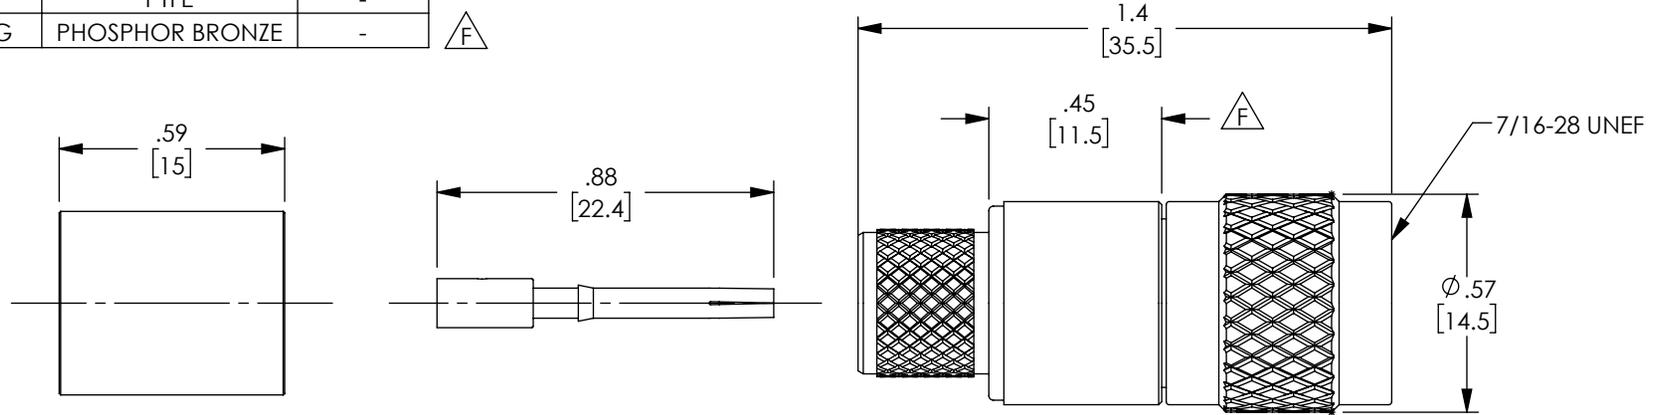

RECOMMENDED
PIN: -SOLDER-
(OR HEX .110 CRIMP)

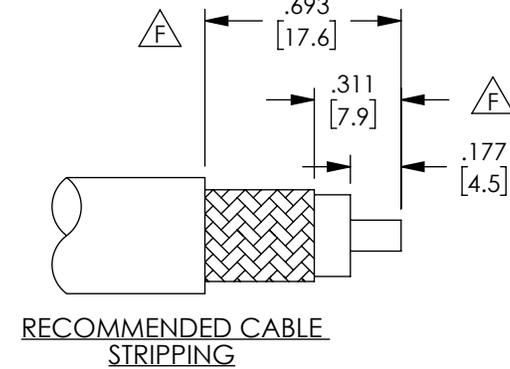

NOTES:


ELECTRICAL:

IMPEDANCE: 50 OHMS
 WITHSTAND VOLTAGE: 1500V
 FREQUENCY RANGE: 0~4 GHz
 VSWR: ≤1.50 @ 0~4 GHz
 DURABILITY: ≥ 500 CYCLES
 CABLE RETENTION: > 40 POUNDS

MISCELLANEOUS:

COMPONENTS SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATIONS PS-0031.

-ALL DIMENSIONS ARE FOR REFERENCE ONLY.-

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0 ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5] FRACTIONS ± 1/32 .XX = ± .02 [.5] ANGLES ± 1° .XXX = ± .005 [.13]	APPROVALS	DATE	 50 High Street, West Mill, North Andover, MA 01845 USA. Phone: 1.800.341.5266 1.978.682.6936		
	DRAWN BY BPUCHASKI	11/11/2009		CATEGORY COAXIAL	
	CHECKED BY M.AUDAS	11/11/2009			
	APPROVED BY M.AUDAS	11/11/2009			
CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY COLOR VARIATIONS MAY OCCUR	PRODUCT DESCRIPTION RP-TNC Straight Plug Crimp For RG8 / LMR400	SIZE A	CAGE CODE 43321	ITEM NO. ARTP-1404	REV. F
THIRD-ANGLE PROJECTION 	SCALE: NONE	CAD FILE: ARTP-1404.SLDDRW	SHEET 1 OF 1		