

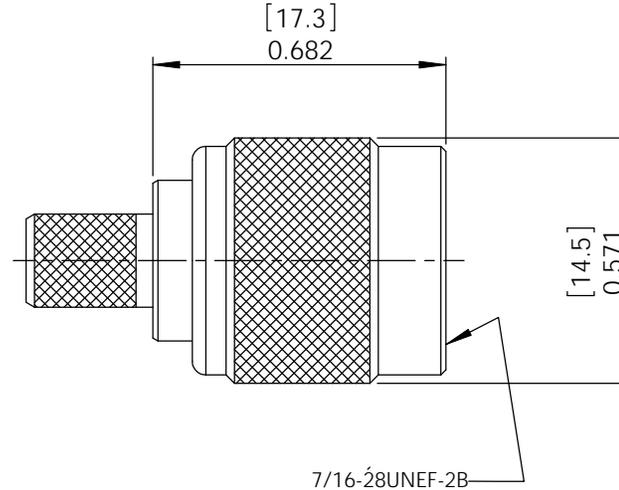



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	03/03/10	B.PUCHASKI
B	ECN 4586: UPDATED FORMAT AND TEXT	03/03/10	B.PUCHASKI
C	ECN 5802: CHANGED VALUES TO 0 - 4 GHz	11/2/11	D.FRISIELLO


DESCRIPTION	MATERIAL	FINISH
CENTER CONTACTS	BRASS	GOLD
OUTER CONTACT	BRASS	NICKEL
SHELL	BRASS	NICKEL
CRIMP FERRULE	BRASS	NICKEL
GASKET	RUBBER	---
INSULATOR	TEFLON	---
RETAINING RING	BRASS	NICKEL



RECOMMENDED FERRULE CRIMP SIZE



RECOMMENDED PIN CRIMP SIZE

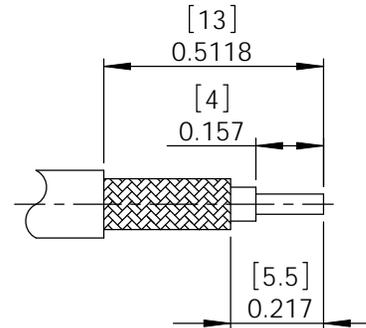

RECOMMENDED CABLE STRIPPING

NOTES:

ELECTRICAL:

IMPEDANCE: 50 OHMS
 WITHSTAND VOLTAGE: 2500V
 FREQUENCY RANGE: 0-4 GHz
 VSWR: <1.50 @ 0-4 GHz
 DURABILITY: > 500 CYCLE
 CABLE RETENTION: > 50 POUNDS



MISCELLANEOUS:

COMPONENTS SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATIONS PS-0031.

ALL DIMENSIONS ARE FOR REFERENCE ONLY.

RoHS Compliant

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] DIMENSIONAL TOLERANCES: .X = ±.1 .XX = ±.01 .XXX = ±.005 ANGULAR TOLERANCES: ALL = ± 1° PROJECTION	APPROVALS	DATE		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845	
	DRAWN BY B.Puchaski	03/03/10			
	CHECKED BY M.Audas	03/03/10	CATEGORY	CONNECTOR	
	APPROVED BY M.Audas	03/03/10	PRODUCT DESCRIPTION		
CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	SIZE A FSCM NO. 43321 DWG. NO. ARTP-1502 REV. C		RP-TNC STRAIGHT PLUG CRIMP FOR 240 SERIES		
COLOR VARIATIONS MAY OCCUR	SCALE: NONE		CAD FILE: ARTP-1502.SLDDRW		
				SHEET 1 OF 1	