


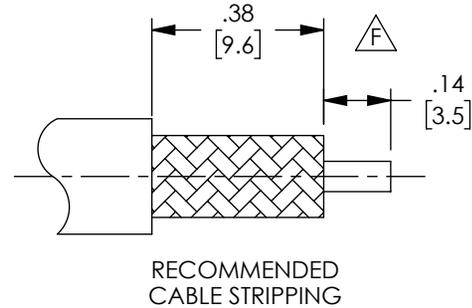
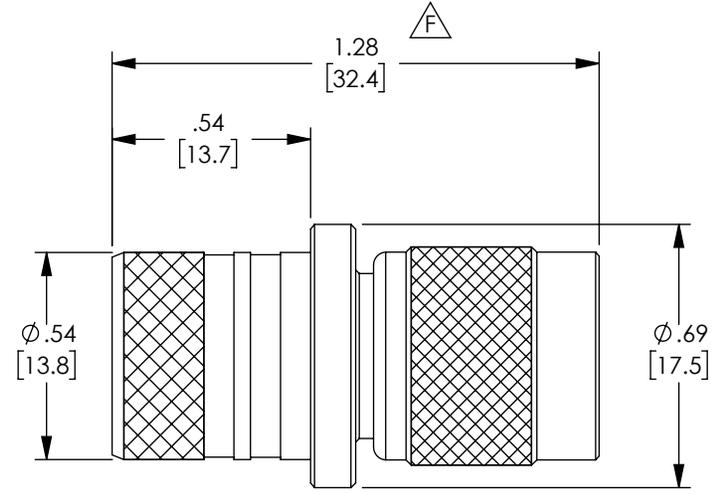


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

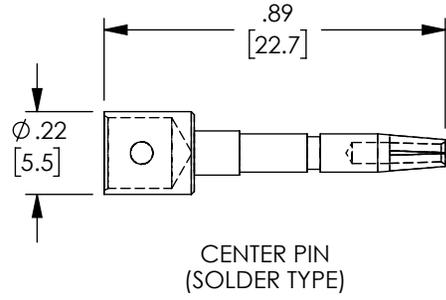

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
F	ECN 9701: REVISED MODEL, DIMENSIONS, STRIP DIMS, MATERIALS, FORMAT	02/19/2019	DFRISIELLO

DESCRIPTION	MATERIAL	FINISH
BODY	BRASS	NICKEL PLATE
CONTACT PIN	BRASS	GOLD PLATE
INSULATOR	PTFE	NATURAL
WASHER	BRASS	NICKEL PLATE
INSULATOR	POM	NATURAL
RETAINING RING	SK5	NICKEL PLATE
GASKET	RUBBER	RED
SHELL	BRASS	NICKEL PLATE
FERRULE	BRASS	NICKEL PLATE

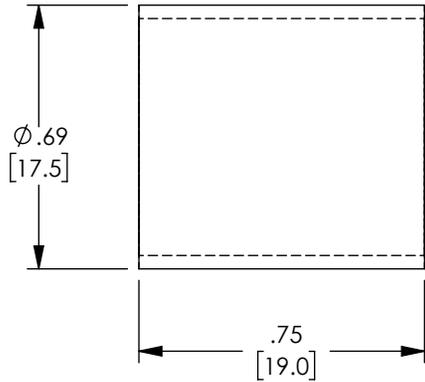

NOTES:

ELECTRICAL:
 IMPEDANCE: 50 OHMS
 FREQUENCY RANGE: 0 ~ 6 GHz
 VOLTAGE RATING: 500 VOLTS PEAK
 DIELECTRIC WITHSTANDING VOLTAGE: 1500 VOLTS RMS

PACKAGING:
 COMPONENT SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

MISCELLANEOUS:
 CABLE RETENTION: 80 LBS PULL.
 APPLICATION: LMR600, AND EQUIVALENT.
 ALL DIMENSIONS ARE FOR REFERENCE ONLY.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5.08] .XX = ± .02 [51] .XXX = ± .005 [1.27]	APPROVALS DRAWN BY DFRISIELLO	DATE 04/27/2010	50 HIGH STREET NORTH ANDOVER, MA 01845			
	CHECKED BY K.BURGNER	DATE 04/27/2010		CATEGORY COAXIAL		
	APPROVED BY K.BURGNER	DATE 04/27/2010	PRODUCT DESCRIPTION CON, RP-TNC PLUG CRIMP			
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	COLOR VARIATIONS MAY OCCUR	SIZE A	FSCM NO. 43321	DWG. NO. ARTP-1606	REV. F
PROJECTION 		SCALE: NONE		CAD FILE: ARTP-1606.SLDDRW		SHEET 1 OF 1