

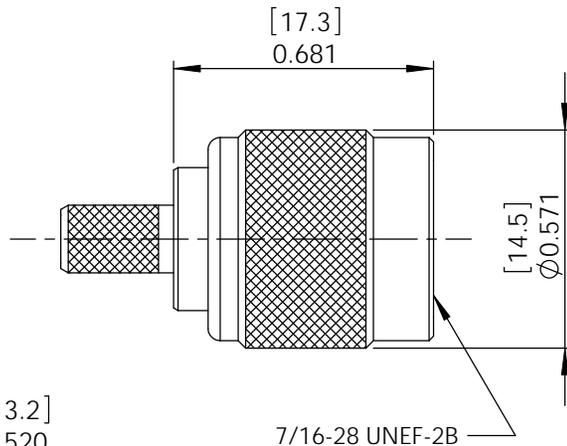




THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	04/17/03	P.PESA
B	ECN 4268: UPDATED BODY AND STRIPPING DIMENSIONS	09/22/09	B.PUCHASKI
C	ECN 4355: UPDATED FORMAT AND TEXT	11/05/09	B.PUCHASKI
D	ECN 5802: CHANGED VALUES TO 0 - 4 GHz	11/2/11	D.FRISIELLO


DESCRIPTION	MATERIAL	FINISH
CENTER CONTACTS	BRASS	GOLD
OUTER CONTACT	BRASS	NICKEL
COUPLING NUT	BRASS	NICKEL
CRIMP FERRULE	BRASS	NICKEL
GASKET	RUBBER	---
INSULATOR	TEFLON	---
RETAINING RING	BRASS	NICKEL



RECOMMENDED FERRULE CRIMP SIZE



RECOMMENDED PIN CRIMP SIZE

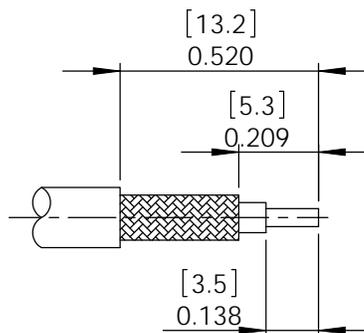

RECOMMENDED CABLE STRIPPING

**NOTES:**

**ELECTRICAL:**

IMPEDANCE: 50 OHMS  
 WITHSTAND VOLTAGE: 1500V  
 FREQUENCY RANGE: 0-4 GHz  
 VSWR: <1.50 @ 0-4 GHz  
 DURABILITY: ≥ 500 CYCLE  
 CABLE RETENTION: > 40 POUNDS

**MISCELLANEOUS:**

COMPONENTS SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATIONS PS-0031.

ALL DIMENSIONS ARE FOR REFERENCE ONLY.

**RoHS Compliant**

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]	APPROVALS	DATE		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	DRAWN BY B.Puchaski	09/22/09		
DIMENSIONAL TOLERANCES: .X = ±.1 .XX = ±.01 .XXX = ±.005	CHECKED BY M.Audas	09/22/09	CATEGORY	
	APPROVED BY M.Audas	09/22/09	CONNECTOR	
ANGULAR TOLERANCES: ALL = ± 1°	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		PRODUCT DESCRIPTION RP-TNC STRAIGHT PLUG CRIMP FOR RG58 /LMR195	
PROJECTION 	COLOR VARIATIONS MAY OCCUR	SIZE <b>A</b>	FSCM NO. <b>43321</b>	DWG. NO. ARTP-1708
		SCALE: NONE	CAD FILE: ARTP-1708.SLDDRW	SHEET 1 OF 1