


8 7 6 5 4 3 2 1

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC.. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	11/11/10	D.GRIFFIN

DESCRIPTION	MATERIAL	FINISH
BODY 1	BRASS	GOLD
BODY 2	BERYLLIUM COPPER	GOLD
DIELECTRIC	TEFLON	---
PIN	PHOSPHOR BRONZE	GOLD

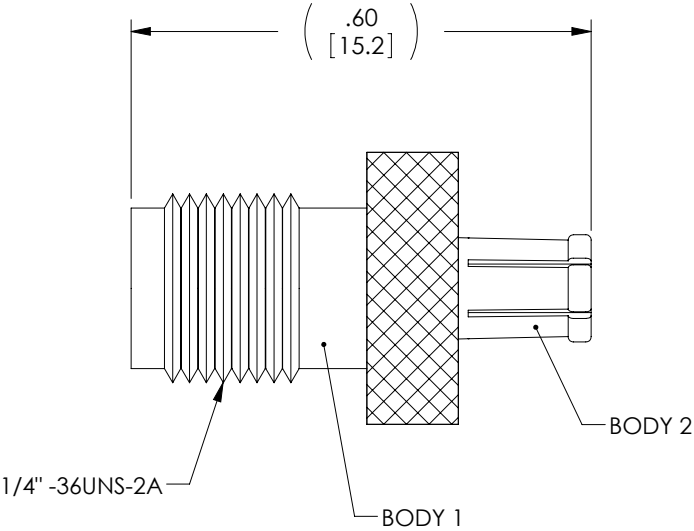

NOTES:



ELECTRICAL:

IMPEDANCE: 50 OHMS
FREQUENCY RANGE: DC ~ 6 GHZ
INSERTION LOSS: .2 dB MAX.

MISCELLANEOUS:

CONNECTOR SHALL BE PACKAGED IN ACCORDANCE WITH L-COM SPEC. PS-0031.

RoHS Compliant ✓

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: X = ± .2 .XX = ± .02 .XXX = ±.005	APPROVALS	DATE	 45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845			
	DRAWN BY D. CASTRO	11/11/10				
	CHECKED BY K. BURGNER	11/11/10	CATEGORY	COAXIAL		
	APPROVED BY K. BURGNER	11/11/10	PRODUCT DESCRIPTION		ADP,MCX PLUG / SMA JACK	
	COLOR VARIATIONS MAY OCCUR		SIZE	FSCM NO.	DWG. NO.	REV.
			A	43321	AXA-MPSF	A
			SCALE: NONE	CAD FILE: AXA-MPSF.SLDDRW		SHEET 1 OF 1