



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	1/30/14	D.GRIFFIN

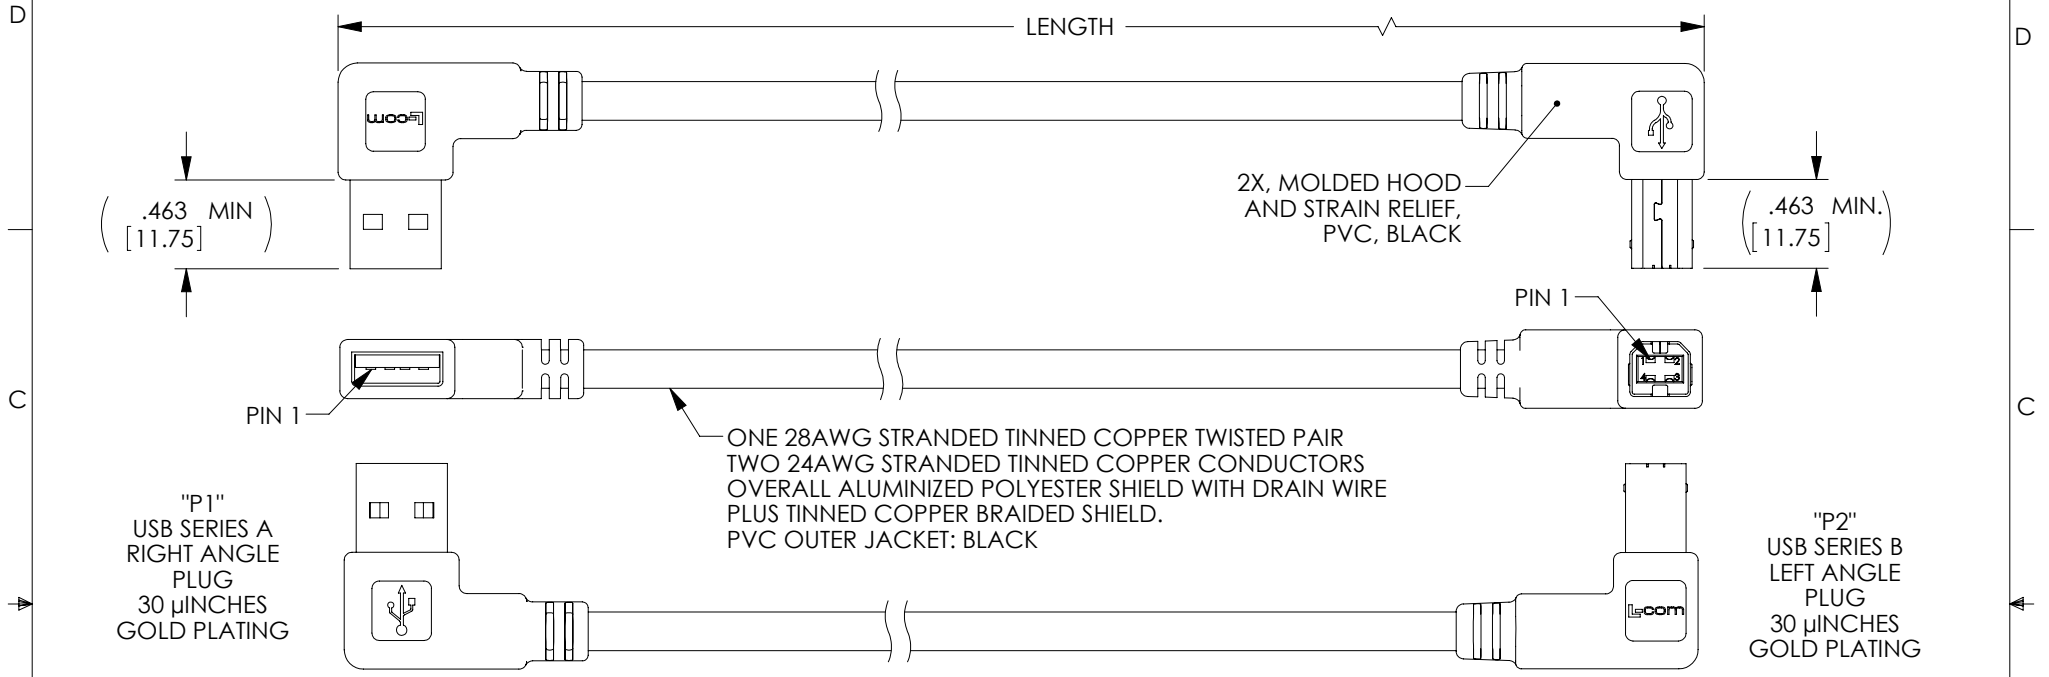

"P1"  
USB SERIES A  
RIGHT ANGLE  
PLUG  
30 μINCHES  
GOLD PLATING

"P2"  
USB SERIES B  
LEFT ANGLE  
PLUG  
30 μINCHES  
GOLD PLATING

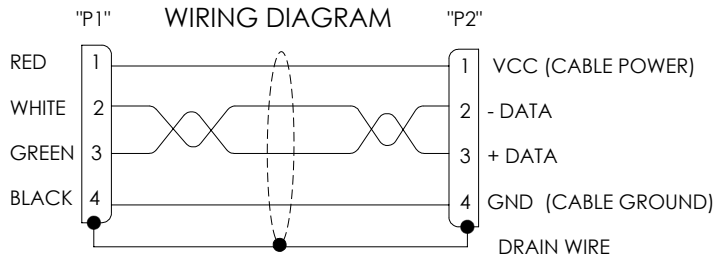

PART NUMBER	LENGTH	
	METERS	FEET
CABLK90RA-LB-03M	0.3	.98
CABLK90RA-LB-05M	0.5	1.64
CABLK90RA-LB-1M	1.0	3.28
CABLK90RA-LB-2M	2.0	6.56
CABLK90RA-LB-3M	3.0	9.84
CABLK90RA-LB-5M	5.0	16.41

- NOTES:**
1. CABLE ASSEMBLY SHALL HAVE 360° SHIELD TERMINATION.
  2. CABLE ASSEMBLY SHALL MEET USB 2.0 REQUIREMENTS.
  3. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
  4. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

**REGULATORY COMPLIANCE:**  
CE2011/65/EU (RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 [5.08] .XX = ±.02 [51] .XXX = ±.005 [1.27]	APPROVALS D.FRISIELLO R.SCOTT S.SMITH	DATE 1/27/14 1/27/14 1/27/14	45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		CATEGORY USB
	PRODUCT DESCRIPTION CA USB 90RA A/90LA B BLK		PRODUCT DESCRIPTION CA USB 90RA A/90LA B BLK
	PROJECTION 	COLOR VARIATIONS MAY OCCUR	SIZE <b>A</b>