



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

| REVISIONS | | | |
|-----------|--|------------|-----------|
| REV | DESCRIPTION | DATE | APPROVED |
| A | INITIAL RELEASE PER BRIAN GATES | 03/30/2017 | JLABOY |
| B | ECN 8743: CHANGE PACKAGING SPEC FROM PKG-00012 TO PS-0031. | 05/01/2017 | JLABOY |
| C | ECN 9053: CREATE 3D MODEL, REVISE DRAWING TO L-COM STANDARDS | 01/18/2018 | DFRSIELLO |
| D | ECN 9537: P1 WIRE MAP PIN 6 TO 16, P2 DESCRIPTION TO 24, REMOVE ROHS | 11/26/2018 | DFRSIELLO |

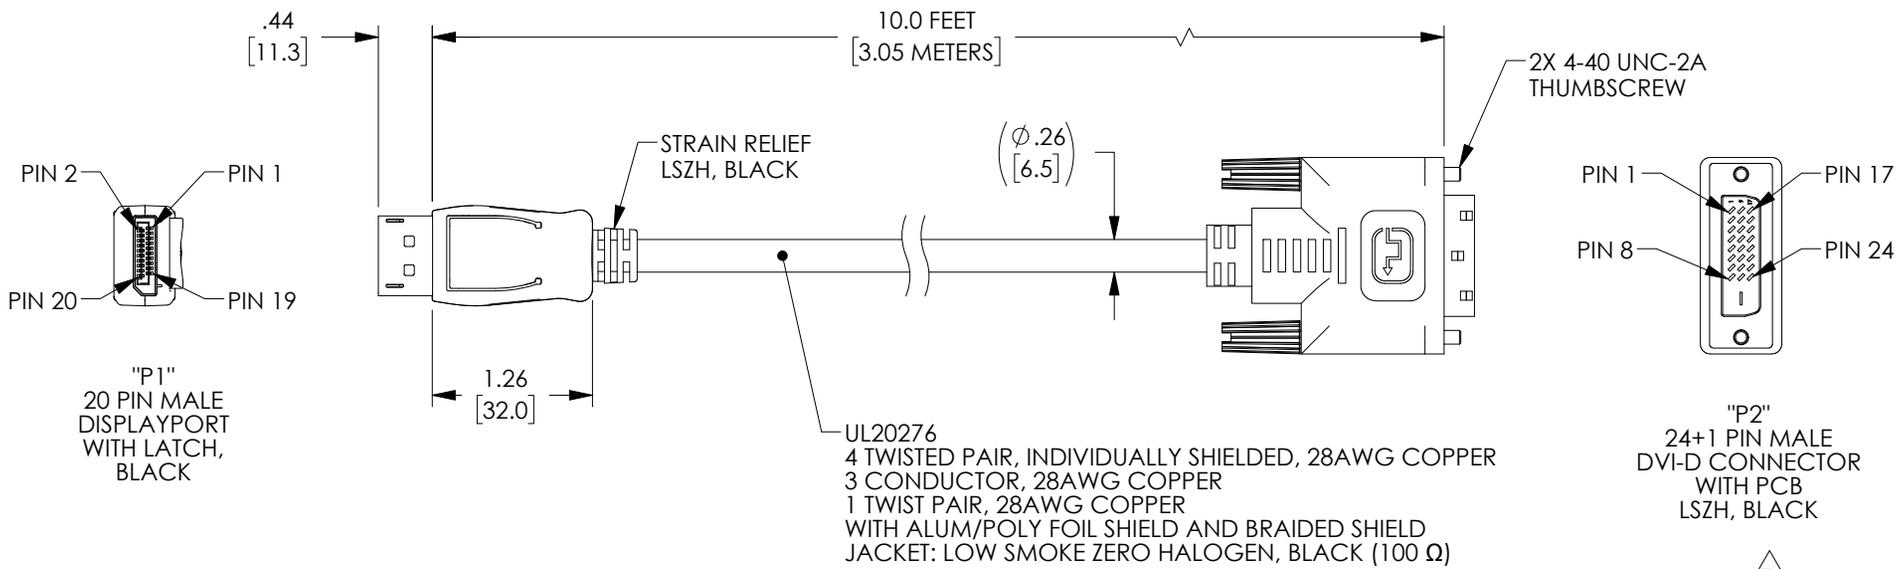

UL20276
 4 TWISTED PAIR, INDIVIDUALLY SHIELDED, 28AWG COPPER
 3 CONDUCTOR, 28AWG COPPER
 1 TWIST PAIR, 28AWG COPPER
 WITH ALUM/POLY FOIL SHIELD AND BRAIDED SHIELD
 JACKET: LOW SMOKE ZERO HALOGEN, BLACK (100 Ω)

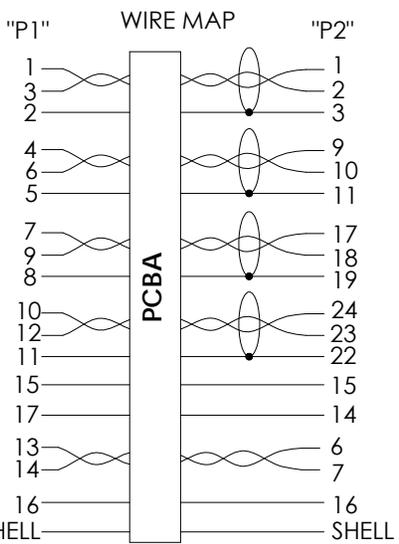

NOTES:

ELECTRICAL PROPERTIES:
 VOLTAGE TEST: DC 300V
 INSULATION RESISTANCE: 10.0M OHM MIN
 CONDUCTIVE RESISTANCE: 2.0 OHM MAX

MISCELLANEOUS:
 INSIDE MOLDED P2 END MUST USE COPPER FOIL AND
 SOLDER BRAID 360 DEGREE TO THE SHELL
 CABLE ASSEMBLY SHALL BE UL CERTIFIED
 CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
 CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN
 ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

| | | | | |
|--|--|-------------|---|------------------|
| UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0% | APPROVALS | DATE | 50 HIGH STREET NORTH ANDOVER, MA 01845 | |
| | DRAWN BY BPUCHASKI | 03/27/2017 | | |
| ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5.08] .XX = ± .02 [1.51] .XXX = ± .005 [1.13] | CHECKED BY JLABOY | 03/27/2017 | PRODUCT DESCRIPTION CA DVI TO DP LSZH 10 FEET | |
| | APPROVED BY BGATES | 03/27/2017 | | |
| PROJECTION | CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY | | DWG. NO. CTLDVI-DLSP-MM-10 | REV. D |
| COLOR VARIATIONS MAY OCCUR | | SCALE: NONE | CAD FILE: CTLDVI-DLSP-MM-10.SLDDRW | SHEET 1 OF 1 |

D
C
B
A

D
C
B
A

8 7 6 5 4 3 2 1

8 7 6 5 4 3 2 1