



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
E	ECN 9537: P1 WIRE MAP PIN 6 TO 16, P2 DESCRIPTION TO 24, REMOVE ROHS	11/26/2018	DFRISIELLO

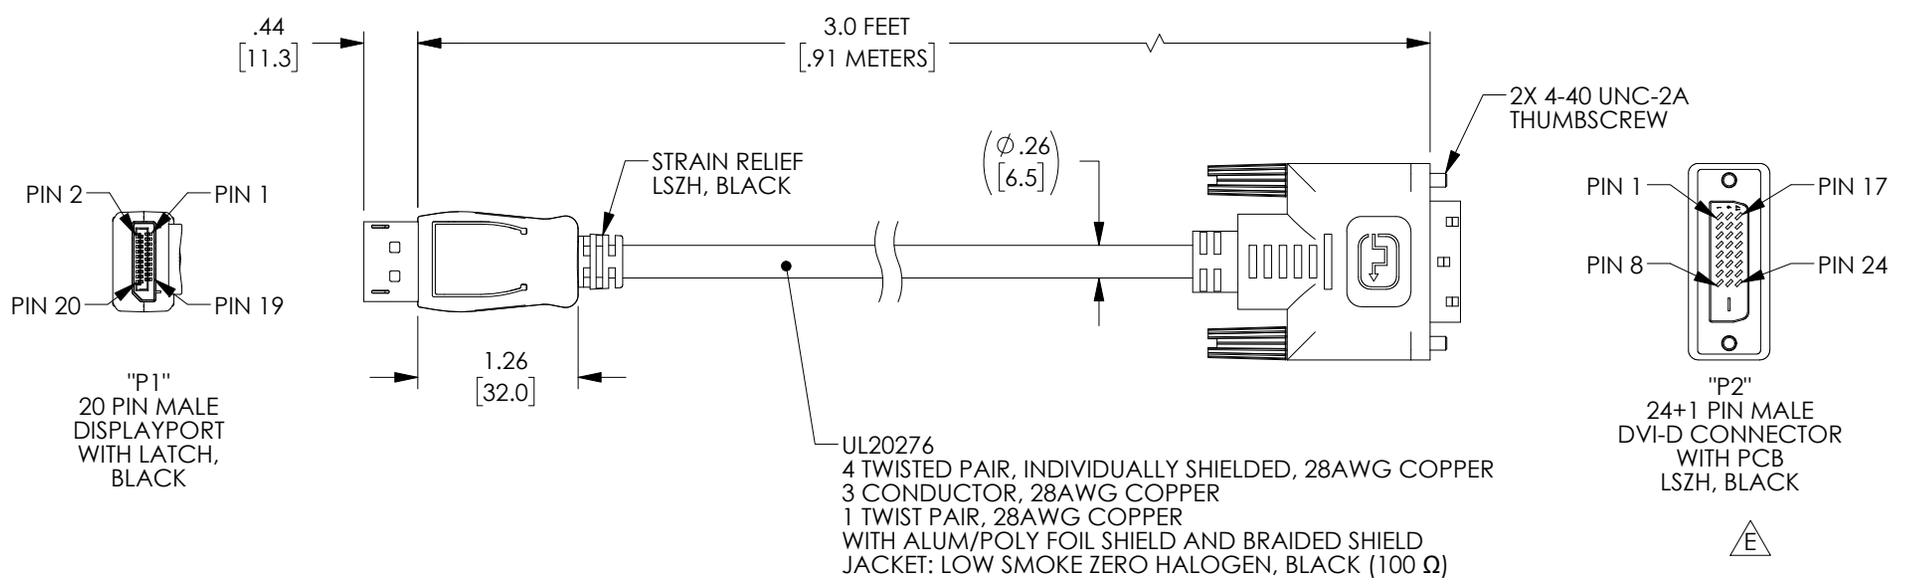

WIRE MAP

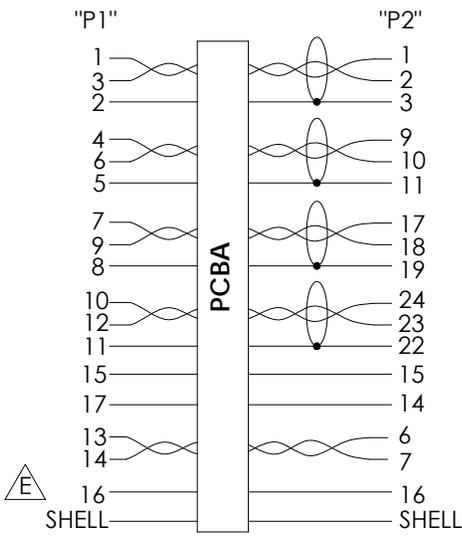

NOTES:

ELECTRICAL PROPERTIES:
 VOLTAGE TEST: DC 300V
 INSULATION RESISTANCE: 10.0M OHM MIN
 CONDUCTIVE RESISTANCE: 2.0 OHM MAX

MISCELLANEOUS:
 INSIDE MOLDED P2 END MUST USE COPPER FOIL AND
 SOLDER BRAID 360 DEGREE TO THE SHELL
 CABLE ASSEMBLY SHALL BE UL CERTIFIED
 CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
 CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN
 ACCORDANCE WITH L-COM SPECIFICATION PS-0031.



UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5.08] .XX = ± .02 [5.1] .XXX = ± .005 [1.3]	APPROVALS DRAWN BY BPUCHASKI	DATE 03/27/2017	50 HIGH STREET NORTH ANDOVER, MA 01845
	CHECKED BY JLABOY APPROVED BY BGATES	03/27/2017	
PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	PRODUCT DESCRIPTION CA DVI TO DP LSZH 3 FEET	SCALE: NONE
COLOR VARIATIONS MAY OCCUR	SIZE A	FSCM NO. 43321	DWG. NO. CTLDVI-DLSP-MM-3
CAD FILE: CTLDVI-DLSP-MM-3.SLDDRW	SHEET 1 OF 1	REV. E	SHEET 1 OF 1