
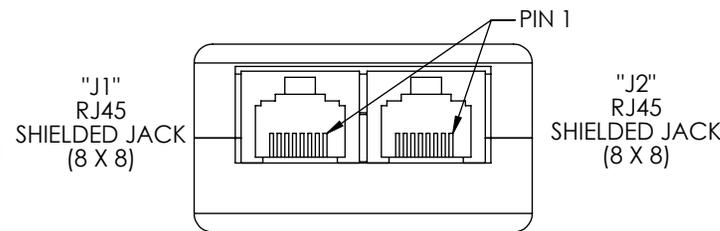
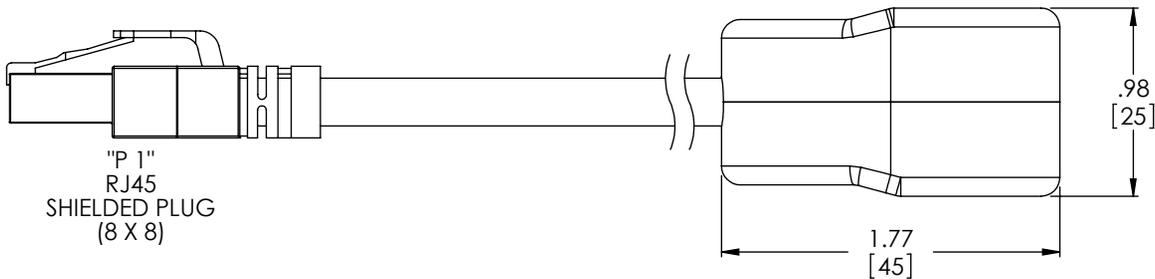
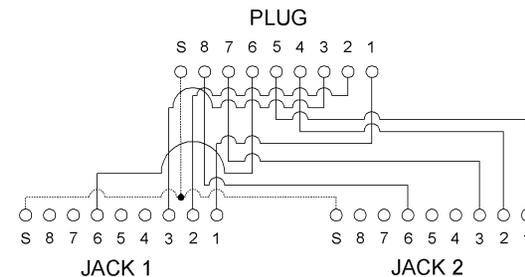


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

| REVISIONS | | | |
|-----------|---|----------|-----------|
| REV | DESCRIPTION | DATE | APPROVED |
| D | ECN1924: CHANGED HOUSING COLOR TO GRAY | 12/08/04 | D. PARHAM |
| E | ECN2529: WIRE GAGE WAS 24AWG | 08/18/06 | D. PARHAM |
| F | ECN3656: CABLE WAS CAT5 PVC. UPDATED FORMAT | 10/21/08 | D. PARHAM |
| G | ECN4140: 12.0 DIM WAS 5.4 | 07/21/09 | D. PARHAM |

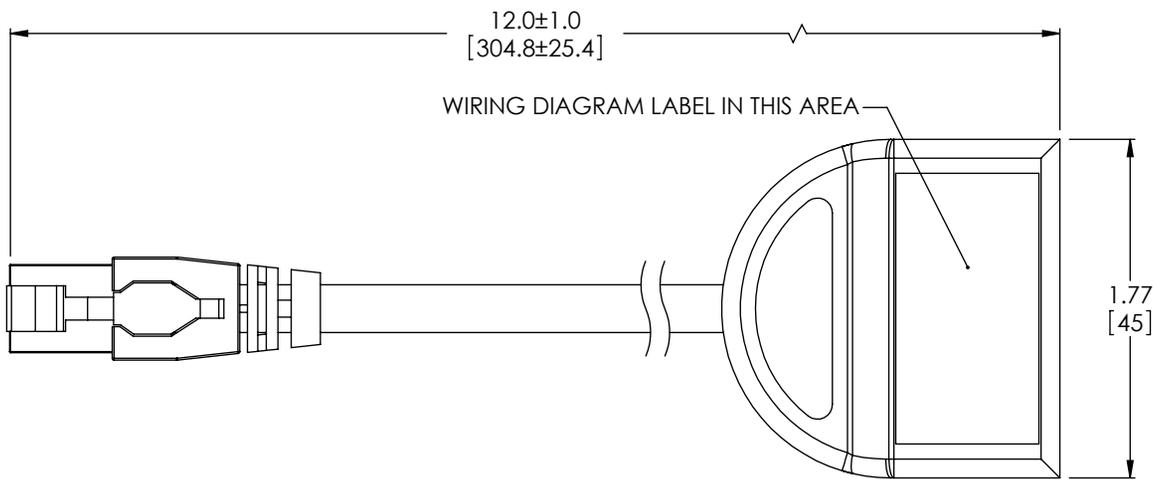

SPECIFICATIONS

MATERIALS

PLUG: POLYCARBONATE, UL94V-1
 CONTACTS: PHOSPHOR BRONZE WITH 50 μINCHES GOLD PLATE ON CONTACT SURFACES
 JACKS HOUSING: HIGH IMPACT, FLAME RETARDANT PLASTIC, GRAY, UL94V-0
 CONTACTS: PHOSPHOR BRONZE WITH 50 μINCHES GOLD PLATE ON CONTACT SURFACES
 DURABILITY: 500 CYCLES MIN

ELECTRICAL

VOLTAGE RATING: 150VAC
 CURRENT RATING: 1.5 AMP MAX
 DIELECTRIC WITHSTANDING VOLTAGE: 1000Vrms, 1 MIN (60 Hz)

CABLE: SHIELDED CATEGORY 5e
 4 TWISTED PAIRS, 26 AWG STRANDED COPPER
 100Ω NOMINAL IMPEDANCE
 UL LISTED COMMUNICATION CABLE, TYPE CM
 LIGHT GRAY LSZH JACKET

ENVIRONMENTAL
 TEMPERATURE: -40°C TO 60°C

| | | | |
|---|---|--|--|
| UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = .3 .XX = .15 PROJECTION | APPROVALS D. PARHAM CHECKED BY B. MAZEJKA APPROVED BY C. McCORMICK | DATE 7/2/2003 7/3/2003 7/3/2003 | 45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845 |
| | CATEGORY MODULAR | | PRODUCT DESCRIPTION MODULAR Y SPLITTER |
| | CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY | | |
| | COLOR VARIATIONS MAY OCCUR | SIZE A | FSCM NO. 43321 |

SCALE: NONE CAD FILE: ECS802-1.SLDDRW SHEET 1 OF 1