

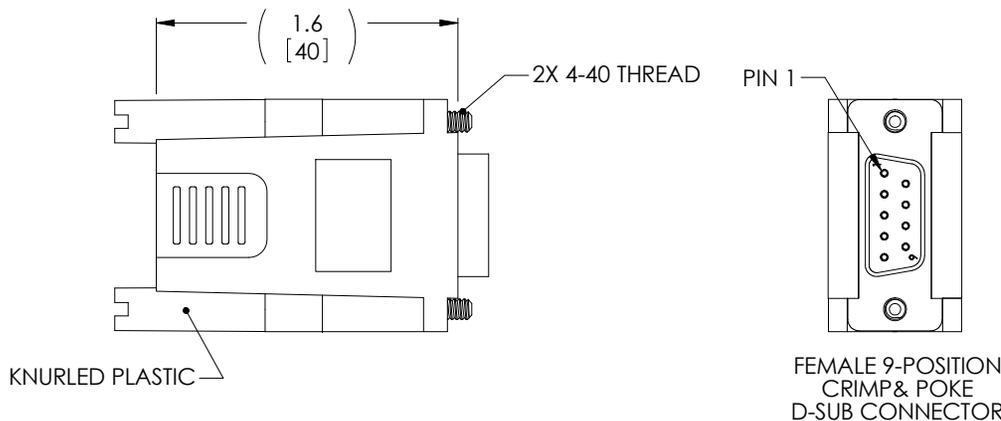


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
F	ECN 7890: UPDATED FORMAT, PACKAGING, ROHS	4/2/15	D. DESJARDIN

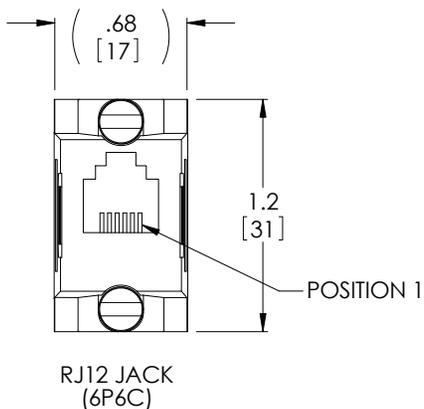

WIRING CHART	
RJ12 JACK	COLOR
1	WHITE OR GRAY
2	BLACK
3	RED
4	GREEN
5	YELLOW
6	BLUE

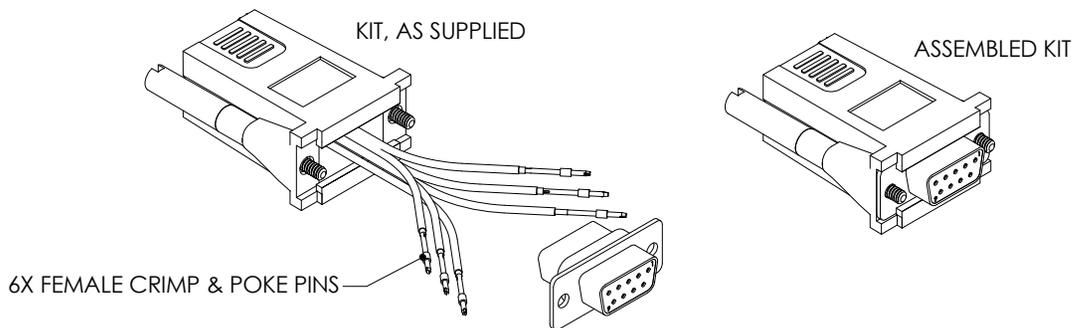

SPECIFICATIONS:
MOLDED PARTS ARE UL94V-0 RATED

MATERIAL:
HOUSING: MOLDED ABS
COLOR: DARK GRAY
D-SUB
INSULATOR: UL94V-0 THERMOPLASTIC
CONTACTS: GOLD PLATED
SHELL: TIN FINISH
RJ12
CONTACTS: GOLD PLATED, 50 μINCHES

MISCELLANEOUS:
COMPONENT SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:
CE2011/65/EU (RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0%	APPROVALS	DATE		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	DRAWN BY D PARHAM	4/11/2001		
ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 [5.08] .XX = ±.02 [1.51] .XXX = ±.005 [1.13]	CHECKED BY T CLARK	5/17/2001	CATEGORY TELECOM/MODULAR	
	APPROVED BY R CARRICK	5/24/2001	PRODUCT DESCRIPTION ADAPTER KIT, DB9F/RJ12 JACK	
PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		SIZE A	FSCM NO. 43321
	COLOR VARIATIONS MAY OCCUR		DWG. NO. REC096F	REV. F
			SCALE: NONE	CAD FILE: REC096F.SLDDRW
			SHEET 1 OF 1	