



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	RELEASED FOR PRODUCTION	5/30/01	D. PARHAM
B	ECN1509: ADDED PRODUCT VALIDATION	9/19/03	D. PARHAM
C	ECN2361: LESSENSED TOLERANCE ON DIMS	04/19/06	D. PARHAM
D	ECN999999: ADDED ROHS STAMP. UPDATED FORMAT	04/18/08	D. PARHAM




"P1"  
9 CONTACT FEMALE  
D-SUB CONNECTOR

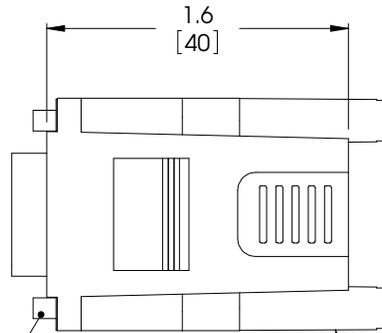

2X 4-40 THREAD

KNURLED PLASTIC

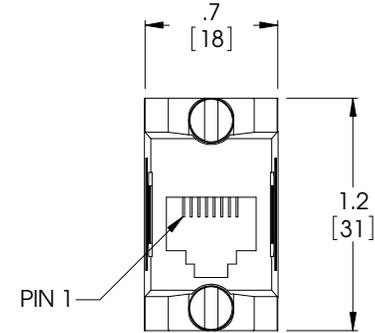


PIN 1

"J1"  
RJ45 JACK  
(8X8)

WIRING MAP	
"J1"	LEAD COLOR
1	BLUE
2	ORANGE
3	BLACK
4	RED
5	GREEN
6	YELLOW
7	BROWN
8	WHITE

WIRE COLORS PER  
USOC WIRING SCHEDULE

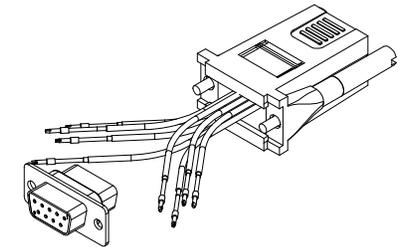

SPECIFICATIONS  
MOLDED PARTS ARE UL94V-0 RATED

MATERIAL:  
HOUSING: MOLDED ABS  
COLOR: DARK GRAY


D-SUB  
INSULATOR: UL94V-0 THERMOPLASTIC  
CONTACTS: GOLD PLATED  
SHELL: TIN FINISH

RJ45  
CONTACTS: GOLD PLATED, 50 μINCHES

NOTE:

1. ADAPTOR KIT MAY BE PROGRAMMED AS NEEDED BY INSERTING AND SEATING EACH FEMALE CONTACT IN THE DESIRED POSITION IN THE D-SUB SHELL.

**RoHS Compliant** ✓

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES (mm)	APPROVALS	DATE		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	DRAWN BY D PARHAM	4/11/2001		
OVERALL CABLE LENGTH TOLERANCE: ≤12 (305) = +1 (25) / -0 >12 (305) ≤60 (1524) = +2(51) / -0 >60 (1524) ≤120 (3048) = +4 / -0 >120 (3048) ≤300 (7620) = +6 / -0 >300 (7620) = +5% / -0%	CHECKED BY T CLARK	5/17/2001	CATEGORY MODULAR	
	APPROVED BY R CARRICK	5/24/2001	PRODUCT DESCRIPTION DB9F TO RJ45 MODULAR ADAPTOR	
ALL OTHER DIMENSIONAL TOLERANCES: .X = .3 .XX = .15	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		SIZE <b>A</b>	FSCM NO. <b>43321</b>
PROJECTION 	COLOR VARIATIONS MAY OCCUR		DWG. NO. REC098F	REV. <b>D</b>
			SCALE: NONE	CAD FILE: REC098F.SLDDRW
			SHEET 1 OF 1	