


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
E	ECN 4944: ADDED FRONT & BACK SHELL FINISH, ADDED PKG NOTE, DEL CURRENT RATING	8/3/10	D. CASTRO

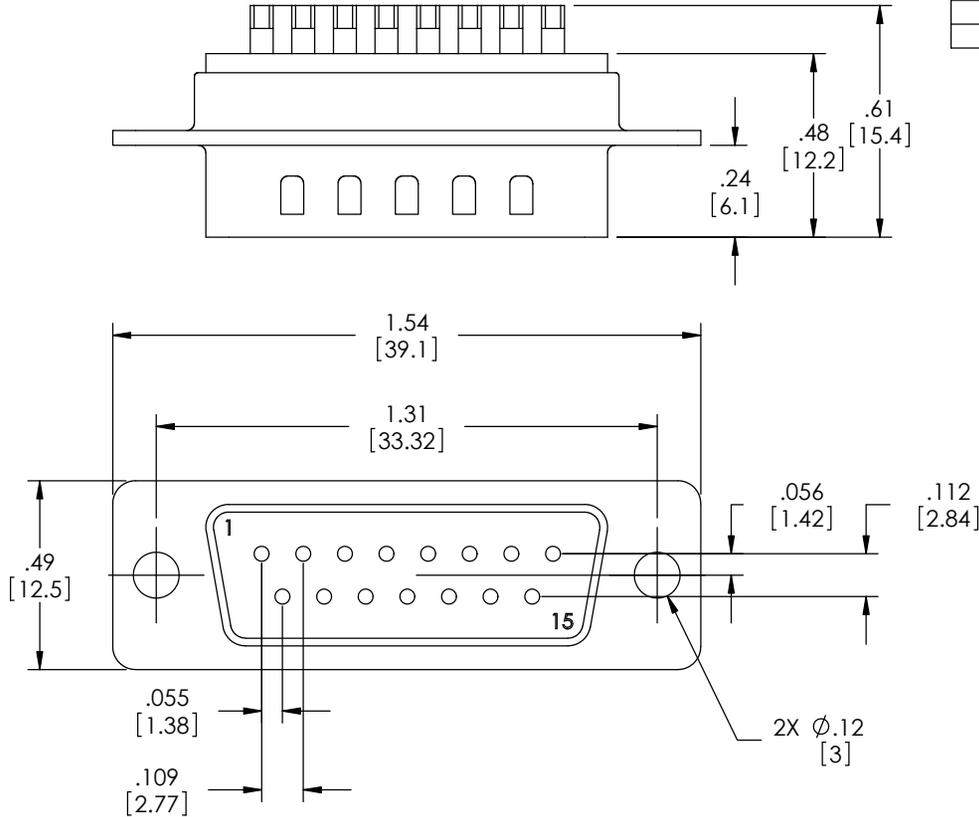

**NOTES:**

**MATERIAL:**

CONNECTOR SHELL: STEEL  
 CONNECTOR INSULATOR: THERMOPLASTIC, UL94V-0 RATED  
 CONTACTS: COPPER ALLOY

**FINISH:**

- △ FRONT SHELL: NICKEL PLATED
- △ BACK SHELL: TIN PLATED
- CONTACTS: GOLD FLASH IN CONTACT AREA OVER NICKEL PLATE
- SOLDER CUPS: TIN PLATED

**ELECTRICAL:**

DIELECTRIC WITHSTANDING VOLTAGE: 1000 VAC rms  
 INSULATION RESISTANCE: 5000MΩ @ 500VDC


**MISCELLANEOUS:**

OPERATING TEMPERATURE: -55°C TO +105°C  
 CONNECTOR SHALL BE PACKAGED IN ACCORDANCE WITH L-COM SPEC. PS-0031.

**REGULATORY COMPLIANCE:**

CE2011/65/EU (RoHS DIRECTIVE)

CATALOG #	PACKAGING
SD15P	1/BAG
SD15P-TRAY	70/TRAY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 [5.08] .XX = ±.02 [51] .XXX = ±.005 [1.27]	APPROVALS	DATE	 45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	DRAWN BY B.MAZEJKA	11/03/2003	
PROJECTION 	CHECKED BY C.McCORMICK	11/04/2003	PRODUCT DESCRIPTION DB15M SOLDER CUP CONNECTOR
	APPROVED BY D.PARHAM	11/04/2003	
COLOR VARIATIONS MAY OCCUR	FSCM NO. <b>43321</b>		DWG. NO. SD15P
1AC02-011	SCALE: NONE	CAD FILE: SD15P.SLDDRW	REV. <b>E</b>