
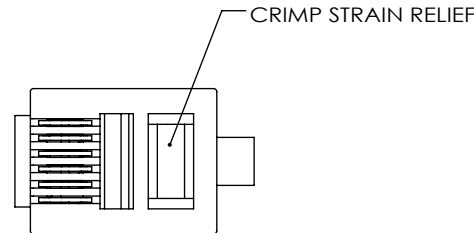
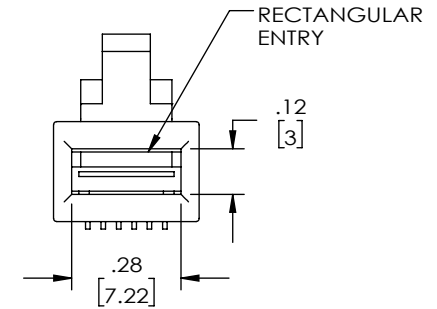

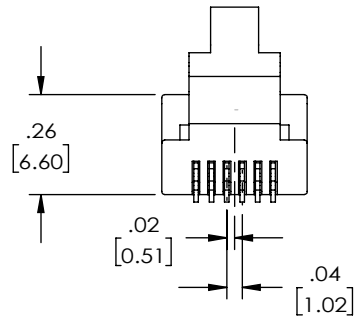


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC.. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
E	ECN 4579: CNG CONTACT FINISH BACK TO 15 U INCHES	2/26/10	D.FRISIELLO
F	ECN 10178: 485 WAS .490, .379 WAS .380, PER PHYSICAL GOODS UPD MODEL	10/29/19	DGUTTADAUR

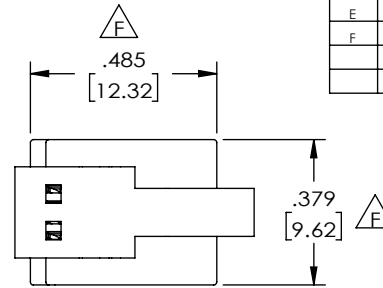

#### NOTES:

#### MATERIAL:

HOUSING: POLYCARBONATE, CLEAR, UL94V-0.  
CONTACTS: PHOSPHOR BRONZE.

#### FINISH:

CONTACTS: 15 MICROINCHES MIN. GOLD IN CONTACT AREA  
OVER 100 MICROINCHES MIN. NICKEL PLATE OVERALL.

#### ELECTRICAL:



VOLTAGE: 125 VAC. MAX.  
CURRENT: 1.5 AMPS MAX.

#### MECHANICAL:

CONTACT STYLE: 2 PRONG (OFFSET).  
COMPATIBLE WITH SOLID AND STRANDED CONDUCTORS.  
CONDUCTOR RANGE: 24 - 26 AWG.  
MAX. CONDUCTOR INSULATION DIAMETER: .038 [0.96].

#### MISCELLANEOUS:

OPERATING TEMPERATURE RANGE: -40°C TO +85°C.  
TERMINATED CONTACT HEIGHT: .237±.005 [0.96].  
COMPONENT SHALL BE INDIVIDUALLY PACKAGED IN  
ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]  OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0%  ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 [5.08] .XX = ±.02 [1.51] .XXX = ±.005 [1.13]	APPROVALS	DATE	 50 HIGH STREET NORTH ANDOVER, MA 01845		
	DRAWN BY D PARHAM	3/27/2002			
	CHECKED BY T CLARK	3/28/2002	CATEGORY	MODULAR/TELECOM	
	APPROVED BY C McCORMICK	3/28/2002	PRODUCT DESCRIPTION		
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		RJ12 PLUG (6X6), UNSHIELDED		
PROJECTION 	COLOR VARIATIONS MAY OCCUR	SIZE	FSCM NO.	DWG. NO.	REV.
		A	43321	TD6P6C	F
		SCALE: NONE			CAD FILE: TD6P6C.SLDDRW