



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.



REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	DRAWING NUMBER WAS 95-0201 12	8/10/09	D. CASTRO

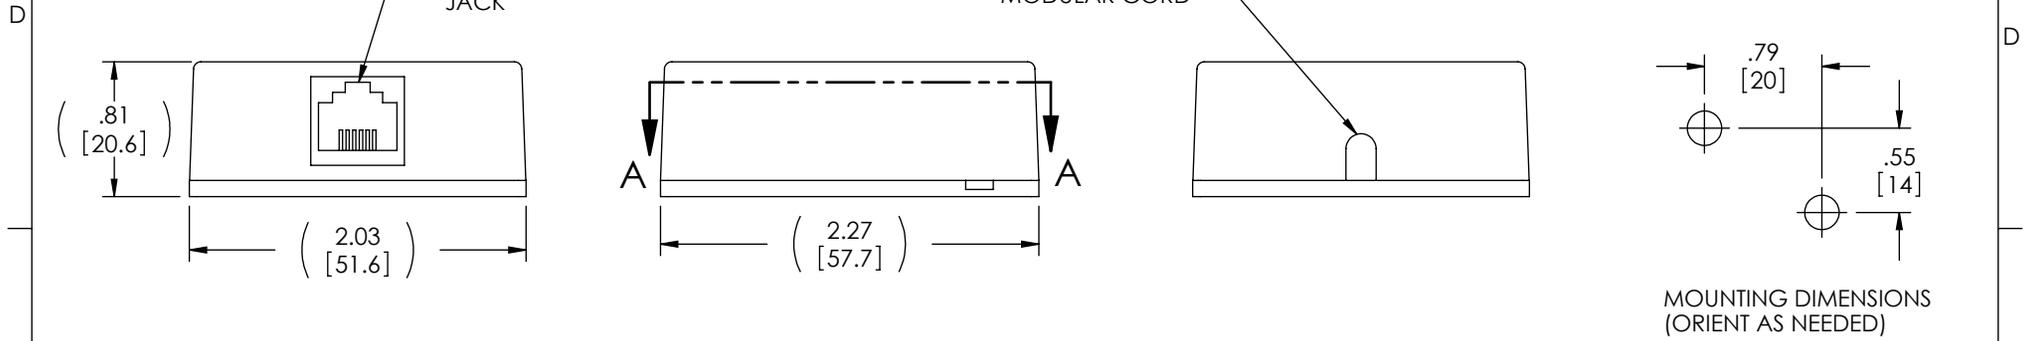

MOUNTING DIMENSIONS (ORIENT AS NEEDED)

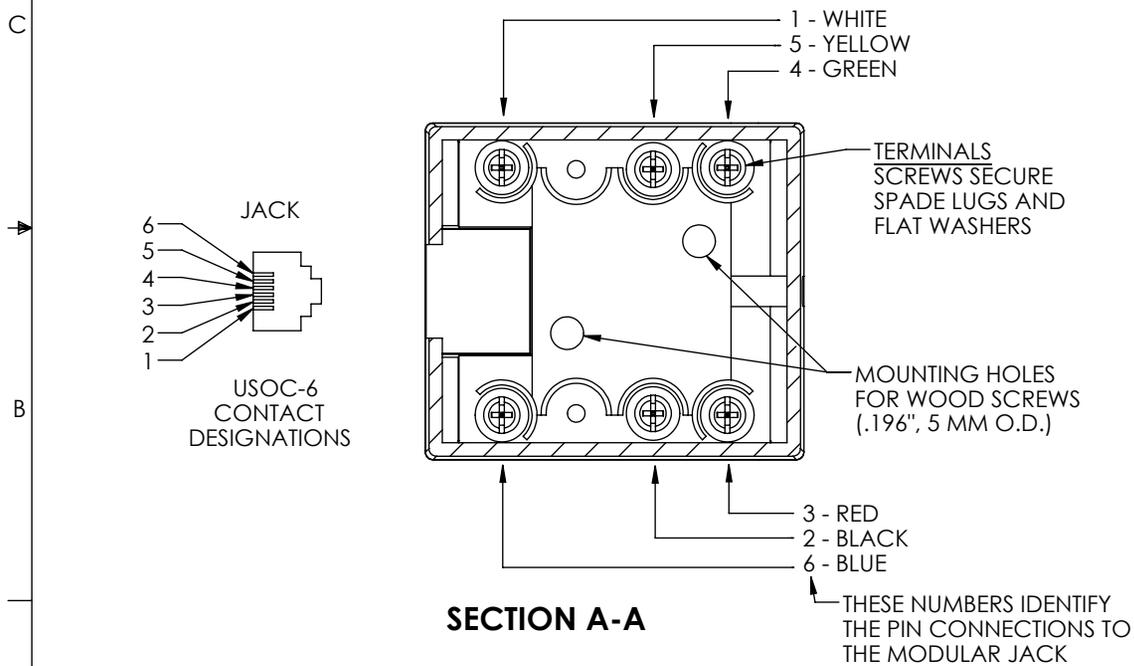

(SUPPLIED WITH DOUBLE-SIDED FOAM TAPE FOR SURFACE MOUNTING WITHOUT HARDWARE)

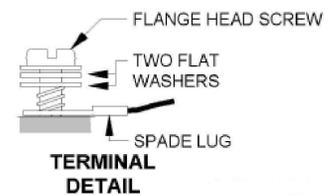

SUPPLIED WITH TWO 5/8" PHILLIPS HEAD WOOD SCREWS

RoHS Compliant

NOTES:

1. BASE AND COVER ARE HIGH IMPACT THERMOPLASTIC, COLOR: BEIGE.
2. CABLE ENTRIES PERMIT REAR OR BOTTOM ENTRY.
3. COVER SNAPS ON.
4. INTERNAL LEADS HAVE COLOR CODED INSULATION PER USOC 8.
5. JACK CONTACTS HAVE 30μ GOLD PLATING.
6. ADAPTOR IS U.L. LISTED AND C.S.A. CERTIFIED.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: $\le 12 [305] = +1 [25] / -0$ $> 12 [305] \le 60 [1524] = +2 [51] / -0$ $> 60 [1524] \le 120 [3048] = +4 [102] / -0$ $> 120 [3048] \le 300 [7620] = +6 [152] / -0$ $> 300 [7620] = +3\% / -0\%$	APPROVALS	DATE	L-com Global Connectivity 45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	DRAWN BY RJD	12/1/95	
ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 .XX = ± .02 .XXX = ± .005	CHECKED BY AEM	12/8/95	CATEGORY MODULAR
	APPROVED BY ENG	12/8/95	PRODUCT DESCRIPTION RJ12 (6X6) JACK, SIDE ACCESS
PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	COLOR VARIATIONS MAY OCCUR	SIZE A
			FSCM NO. 43321
			DWG. NO. TDA310-6C
			REV. A
			SCALE: NONE
			CAD FILE: TDA310-6C.SLDDRW
			SHEET 1 OF 1