
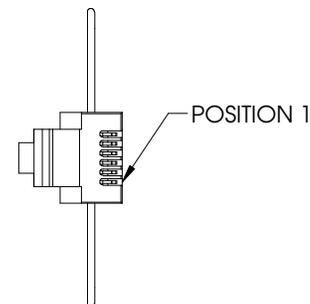


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	07/17/06	MCCORMICK
B	ECN2547: UPDATE DRAWING FORMAT. CORRECT NOTES. REMOVED TINNED DIM	08/30/06	D. PARHAM
C	ECN3306: ADDED 5, 10 & 25 FT LENGTHS. UPDATED FORMAT.	04/28/08	D. PARHAM

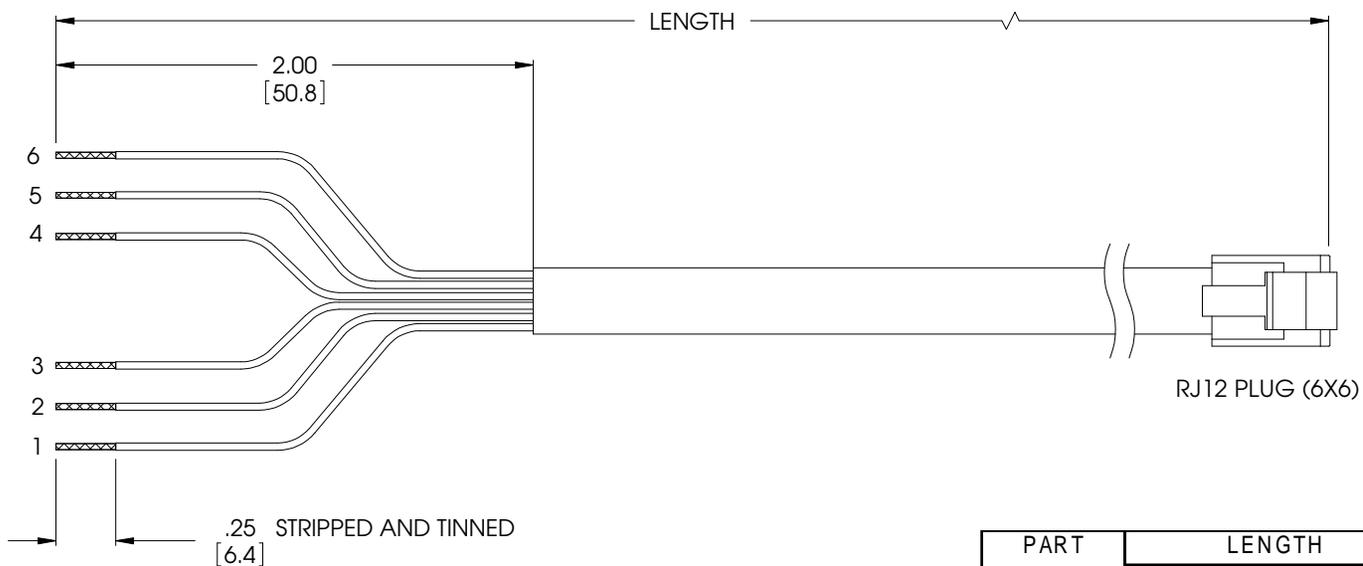

PART NUMBER	LENGTH	
	FEET	METERS
TDC029-1	1.0	0.31
TDC029-2	2.0	0.61
TDC029-5	5.0	1.52
TDC029-7	7.0	2.13
TDC029-10	10.0	3.05
TDC029-14	14.0	4.27
TDC029-25	25.0	7.62

WIRING MAP	
WHITE	1
BLACK	2
RED	3
GREEN	4
YELLOW	5
BLUE	6

**NOTES:**

**MATERIAL:**

PLUG HOUSING: POLYCARBONATE, CLEAR, UL94V-0  
 CONTACTS: PHOSPHOR BRONZE  
 CABLE JACKET: PVC, GRAY

**FINISH:**

CONTACTS: 50 μINCHES GOLD IN CONTACT AREA  
 OVER 100 μINCHES NICKEL PLATE OVERALL.

**CABLE CHARACTERISTICS:**

6 CONDUCTOR FLAT MODULAR CORD, SILVER SATIN PVC OUTER JACKET  
 U.L. STYLE 20251, 26 AWG STRANDED

**MISCELLANEOUS:**

PLUG CONFORMS TO TIA-1096  
 OPERATING TEMPERATURE RANGE: -20°C TO +60°C  
 CORDS TO BE TESTED FOR CONTINUITY  
 CORDS TO BE INDIVIDUALLY PACKAGED IN A POLYBAG

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES (mm)	APPROVALS	DATE		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845	
	DRAWN BY C.MCCORMICK	07/17/2006			
OVERALL CABLE LENGTH TOLERANCE: ≤12 (305) = +1 (25) / -0 >12 (305) ≤60 (1524) = +2(51) / -0 >60 (1524) ≤120 (3048) = +4 / -0 >120 (3048) ≤300 (7620) = +6 / -0 >300 (7620) = +5% / -0%	CHECKED BY ENG	07/17/2006	CATEGORY MODULAR		
	APPROVED BY J.ROBERTS	07/17/2006	PRODUCT DESCRIPTION FLAT CABLE (6X6) W/TINNED ENDS		
ALL OTHER DIMENSIONAL TOLERANCES: .X = .3 .XX = .15	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	SIZE <b>A</b>	FSCM NO. <b>43321</b>	DWG. NO. <b>TDC029</b>	REV. <b>C</b>
PROJECTION 	COLOR VARIATIONS MAY OCCUR	SCALE: NONE		CAD FILE: TDC029.SLDDRW	SHEET 1 OF 1