



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	6/7/17	D.FRISIELLO

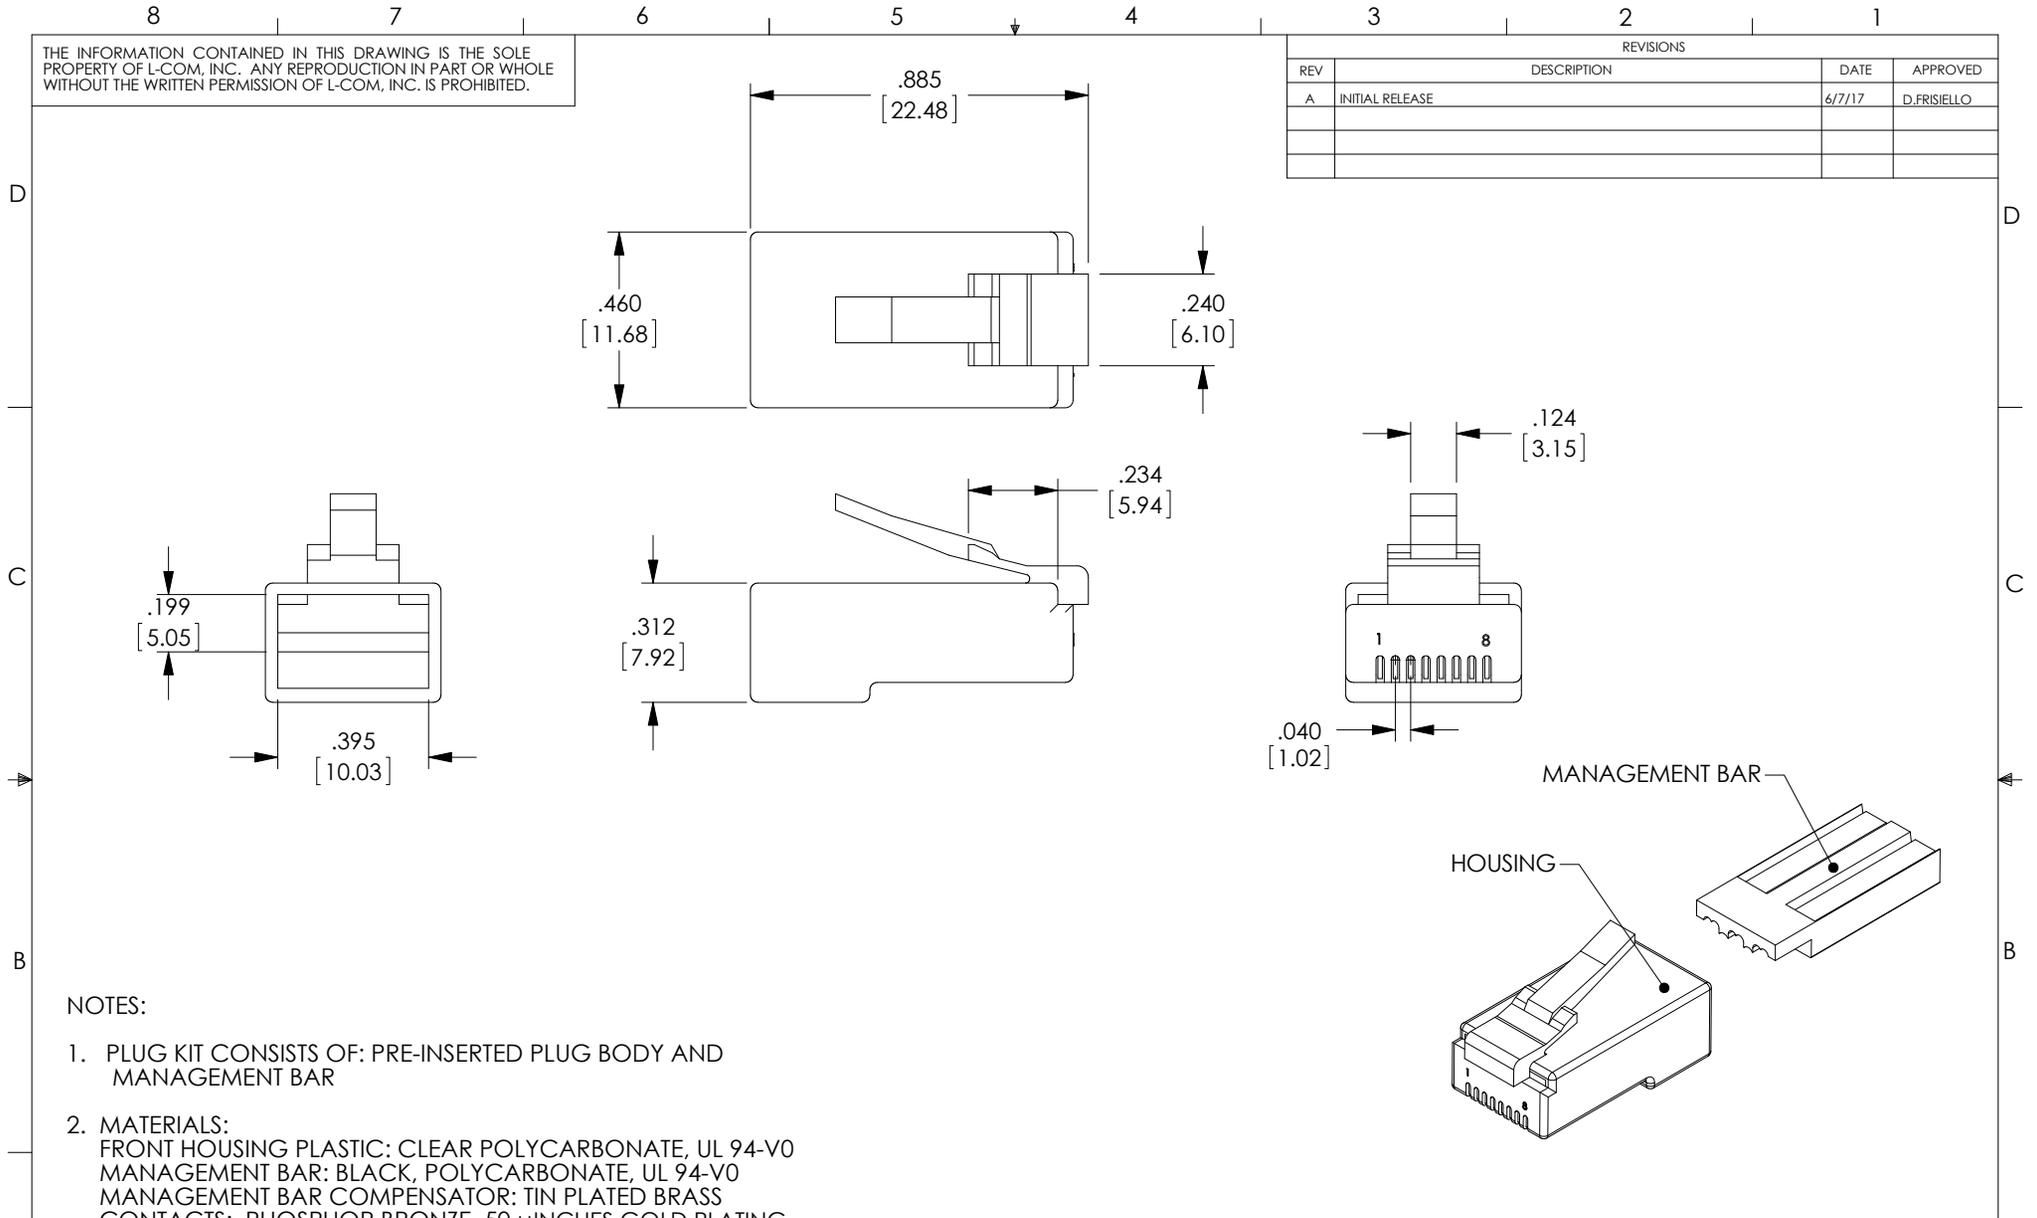

- NOTES:
1. PLUG KIT CONSISTS OF: PRE-INSERTED PLUG BODY AND MANAGEMENT BAR
 2. MATERIALS:
FRONT HOUSING PLASTIC: CLEAR POLYCARBONATE, UL 94-V0
MANAGEMENT BAR: BLACK, POLYCARBONATE, UL 94-V0
MANAGEMENT BAR COMPENSATOR: TIN PLATED BRASS
CONTACTS: PHOSPHOR BRONZE, 50 μINCHES GOLD PLATING
 3. CONTACTS TERMINATE STRANDED OR SOLID CONDUCTORS BETWEEN .037" [0.94] TO .042 [1.7] OUTSIDE DIAMETER OF INSULATION.
 4. TERMINATED PLUG HEIGHT: .237" [6.02] +/- .005 [0.13]
 5. COMPONENT SHALL BE PACKAGED IN BULK OF 50 PIECES PER BAG IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

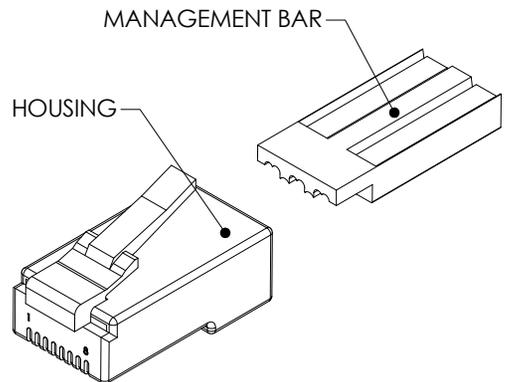

REGULATORY COMPLIANCE:
CE2011/65/EU (RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0%	APPROVALS	DATE	 50 HIGH STREET NORTH ANDOVER, MA 01845	
	DRAWN BY D.FRISIELLO	6/1/17		
ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5.08] .XX = ± .02 [51] .XXX = ±.005 [13]	CHECKED BY 6/7/17	M.MARTINEZ	CATEGORY TELECOM/MODULAR	
	APPROVED BY D.GUITADAURO	6/7/17	PRODUCT DESCRIPTION PLUG RJ45(8X8) CAT6	
PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		SIZE A	FSCM NO. 43321
	COLOR VARIATIONS MAY OCCUR		DWG. NO. TSP3988C6	REV. A
			SCALE: NONE	CAD FILE: TSP3988C6.SLDRW
			SHEET 1 OF 1	