
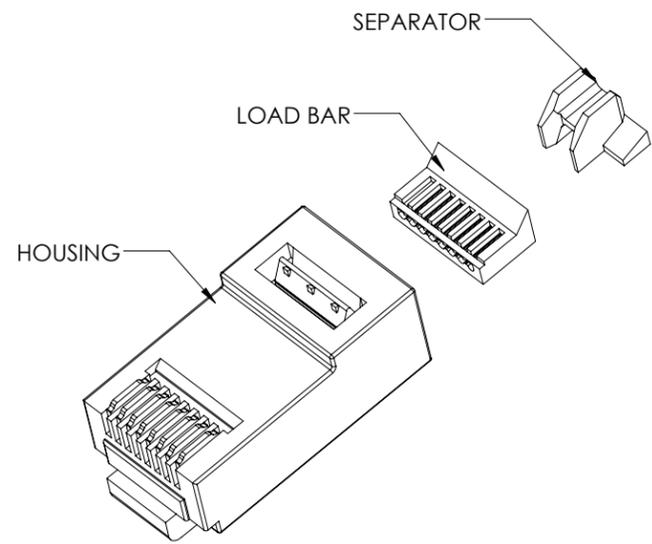
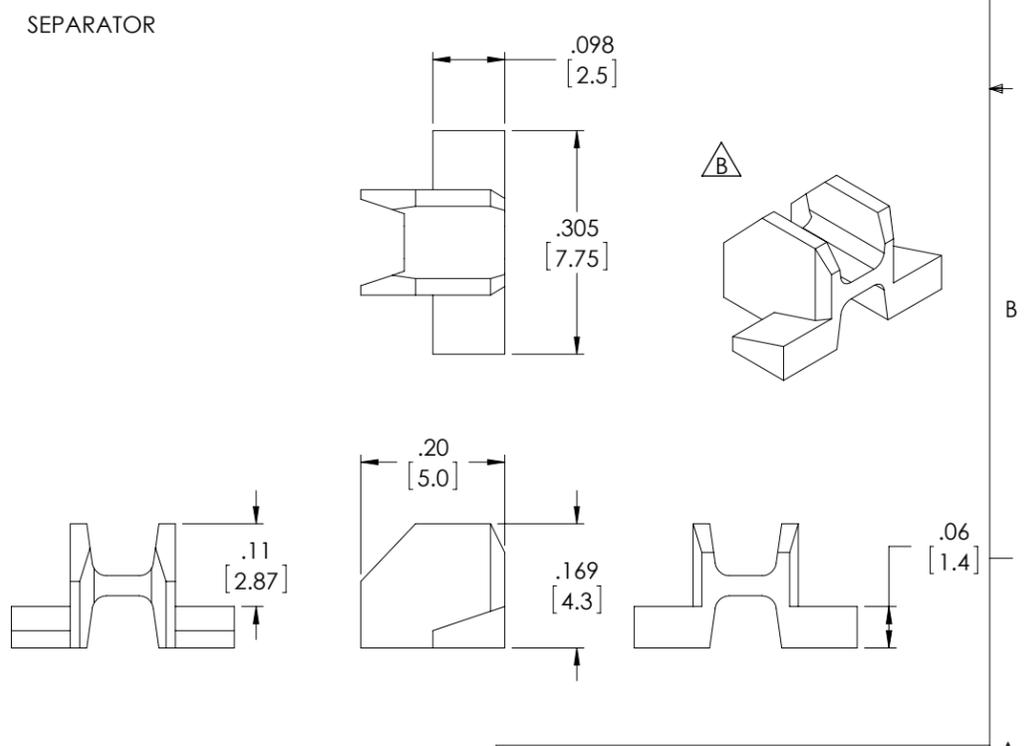
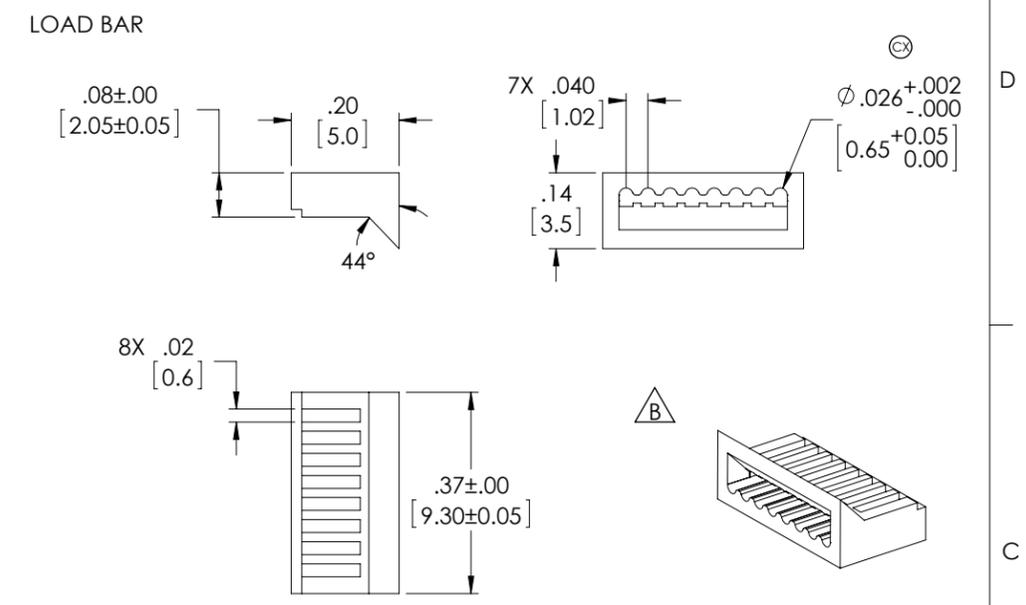


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTIONS IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	CHANGED BY
A	CN INITIAL RELEASE	11/04/15	S.LI
B	ECN 8470:PER VENDOR DWG UPD HOUSING,LOAD BAR ,SEPARATOR,NOTES,UPD DWG FORMAT	09/07/16	D.CUI

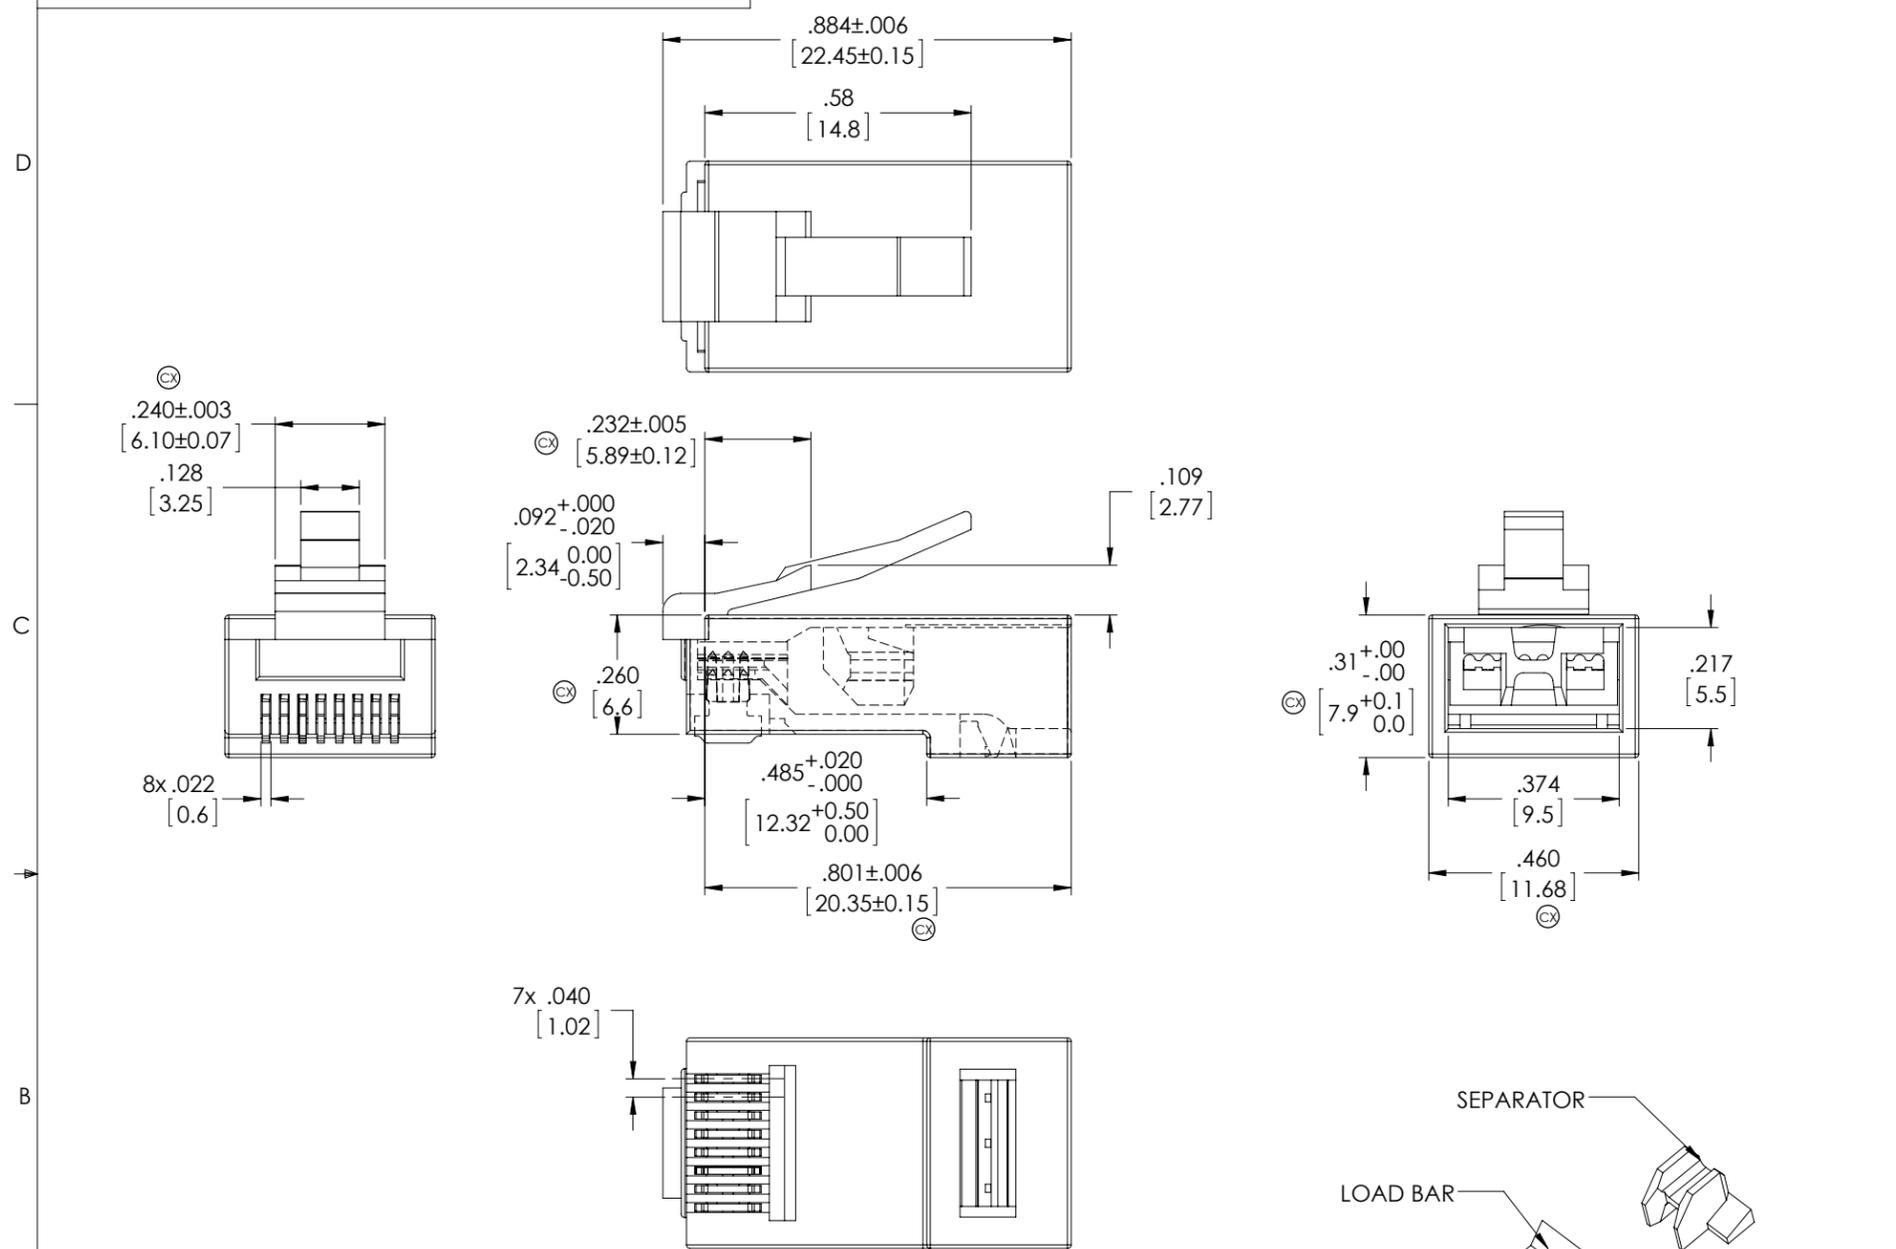

NOTES

MATERIAL :
CONTACT: COPPER ALLOY; 50U" GOLD OVER NICKEL PLATED
HOUSING,LOAD BAR&SEPARATOR: PC,UL94 V-0; COLOR:TRANSPARENT

ELECTRICAL :
VOLTAGE: 250V AC, CURRENT: 2A MAX.
CONTACT RESISTANCE:20mΩ MAX.
DIELECTRICAL WITHSTANDING VOLTAGE:1000V DC/MIN
INSULATION RESISTANCE: 500MΩ MIN. @ 1000V DC

MISCELLANEOUS:
OPERATING TEMPERATURE RANGE: -40°C TO +125°C
STORAGE TEMPERATURE RANGE: -25°C TO +75°C
PLUG DESIGNED FOR CATEGORY 6 APPLICATION
PARTS SHALL COMPLY WITH TIA-1096 STANDARD
CONDUCTOR RANGE:STRANDED OR SOLID WIRE,28 AWG
CONDUCTOR INSULATION DIAMETER : 0.7~0.75MM
Ⓢ PRESENT CRITICAL DIMENSIONS

REGULATORY COMPLIANCE:
CE2011/65/EU(RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]	APPROVALS	DATE		50 HIGH STREET NORTH ANDOVER, MA 01845	
	DRAWN BY S.LI	11/04/2015		CATEGORY	MODULAR
DIMENSIONAL TOLERANCES: .X = ±.1 [2.54] .XX = ±.01 [.25] .XXX = ±.005 [0.13]	CHECKED BY B.ZHANG	11/04/2015	PRODUCT DESCRIPTION		
	APPROVED BY S.PAN	11/04/2015	CAT6 RJ45 8P8C UNSHIELD PLUG		
ANGULAR TOLERANCES: ALL = ± 1°	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		SIZE	FSCM NO.	DWG. NO.
PROJECTION	COLOR VARIATIONS MAY OCCUR		B	43321	TSP8028C6
SCALE: 1:1		CAD FILE: TSP8028C6.SLDDRW	REV. B		SHEET 1 OF 1